

CEROTOR SERIES GEAR PUMPS



The Cerotor series combines the toughness of ceramic with the precision of an internal gear pump.

The use of ceramic makes it a perfect fit for pumping abrasive and non-lubricating fluids. From chocolate to titanium dioxide, the use of ceramics for all sliding surfaces makes this a truly robust design. An innovative tooth design results in pulseless fluid flow. DPP's reputation for precision extends to this design, resulting in high volumetric efficiency and stable performance. Integration with a magnetic coupling and bearing-less stator results in a leak-free, long life pump.

The Cerotor Series - Engineering Your Flow.

- › Continuous Ink Jet Printing with Abrasive Particles
- › Food and Beverage with Chocolate and other Abrasive Particles
- › Pharmaceutical Coatings

Benefits



Robust: All sliding surfaces are made from Alumina, one of the hardest materials available. The rotors will pass nearly any suspended pigment without wearing.



Long Life: DPP pumps are all characterized by their robustness and performance. Wear and tear is at its lowest, and their smart designs ensure a sustainable reduction of operating costs.



100% Outgoing Test: Before any pump leaves our factory, it is stringently and extensively tested in accordance with its specifications. Our customers receive detailed test reports, to confirm performance.



Chemically Resistant: Our pumps are made from materials resistant to a wide range of aggressive chemicals, operating reliably and precisely in even the harshest environments.



Low Pressure Pulsation: Thanks to their smart drives and smooth profiles, our pumps ensure extremely smooth fluid delivery with almost no pressure pulsation.



No Shaft Seals: DPP gear pumps are hermetically sealed instead of using conventional shaft seals. This means low maintenance for you and your customers, a long service life and the highest degree of productivity.

Specifications*

Performance

Max. continuous pressure:	6 bar
Max. intermittent pressure:	8 bar
Max. static case pressure:	15 bar
Flow Rate	(see pages 4-5)
Inlet:	Self-priming
Fluid viscosity range:	0.3 - 1000 cps

Temperature

Fluid temperature range:	0-95°C
Ambient air temp. range:	0-80°C
Relative humidity range:	0-95%
	non-condensing

Construction

Metal components:	316L stainless steel
Gears:	Alumina (ceramic)
O-ring options:	EPDM, Silicone, FKM, Nitrile
Inlet/Outlet:	1/4" & 6mm Push Connect, 1/8"-NPT, G1/8, 1/4-28 UNF
Marking:	Permanent laser-mark identification for 100% traceability

*Performance values are limits and cannot all happen simultaneously.
Please contact your sales engineer for further technical information and customized options.

Contact Tel.:
Contact E-Mail:

Switzerland: +41 44 866 72 72
switzerland@dpp.swiss

USA: +1 209 365 0405
usa@dpp.swiss

China: +86 21 64958516
china@dpp.swiss

Page 1/5




Engineering Your Flow

Product Datasheet

Motor Options



12 & 25W Basic BLDC




Centralize controls away from the pump onto an OEM circuit board. This gives the customer maximum flexibility and may reduce overall costs.

Specifications

Supply Voltage:	24 vdc
Rotation:	Bi-directional
Control Options:	Customer provided
Max. Current:	2 amps
Feedback:	Hall sensors
IP Rating:	Parylene-C splash protection
Electrical Connection:	Board-mounted connector, flying leads or custom termination
Total Pump Mass:	0.30 to 0.40 kg

12 & 25W Smart BLDC

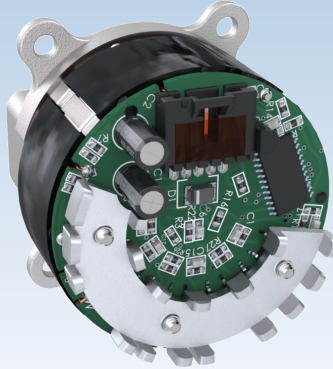


On board control simplifies electronics for the customer. Supply 24 vdc power and a 0-5 vdc control and let the pump do the rest.

Specifications

Supply Voltage:	24 vdc
Rotation:	Bi-directional
Control Options:	0-5 vdc PWM Potentiometer
Max. Current:	1.6 amps
Feedback:	Tachometer
IP Rating:	Parylene-C splash protection
Electrical Connection:	Board-mounted connector, flying leads or custom termination
Total Pump Mass:	0.35 to 0.45 kg

35W Advanced BLDC

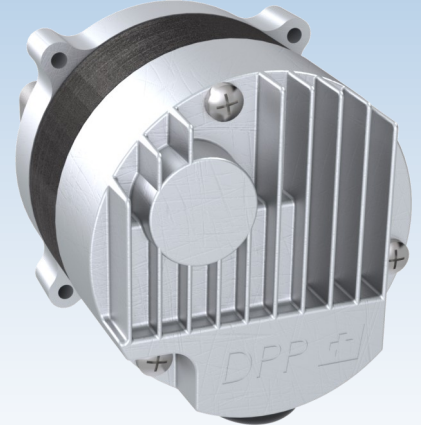

Our most advanced motor offers numerous control options including RS-485 digital communication. Delivered power of 35W in a compact design rivals any stator option on the market.

Specifications

Supply Voltage:	24 vdc
Rotation:	Bi-directional
Control Options:	0-5 vdc PWM RS-485 Digital Pre-programmed
Max. Current:	2.0 amps
Feedback:	Tachometer Digital: Speed & Current
IP Rating:	IP55
Electrical Connection:	Flying leads or custom termination
Total Pump Mass:	0.70 kg

Pump Sizes




Various pump displacements are easily achieved by changing the gear width or tooth profile, all while maintaining the same envelope diameter. Performance values are limits and cannot all happen simultaneously. See flow curves for more information.


	Cerotor 1000		Cerotor 1500	
	Water	3cPs Glycol	Water	3cPs Glycol
Maximum Flow Rate (ml/min)	1500	1500	2500	2600
Maximum Pressure (bar)	4.2	5.5	6	6

Dimensional Outline


Basic BLDC

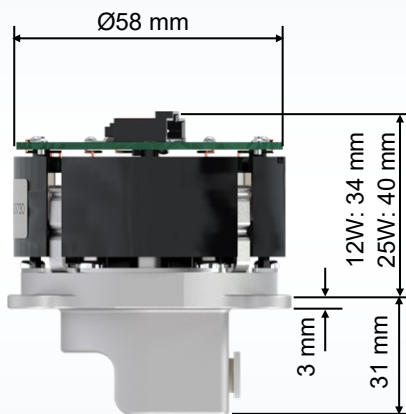


Smart BLDC

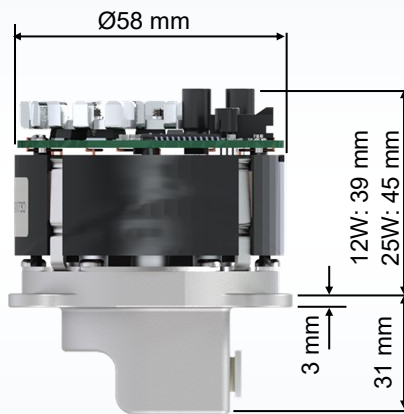


Advanced BLDC

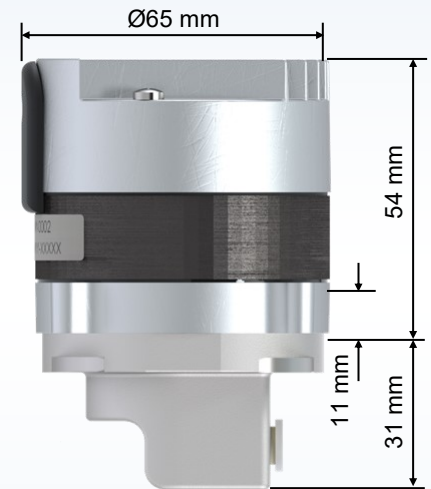

Basic & Smart BLDC

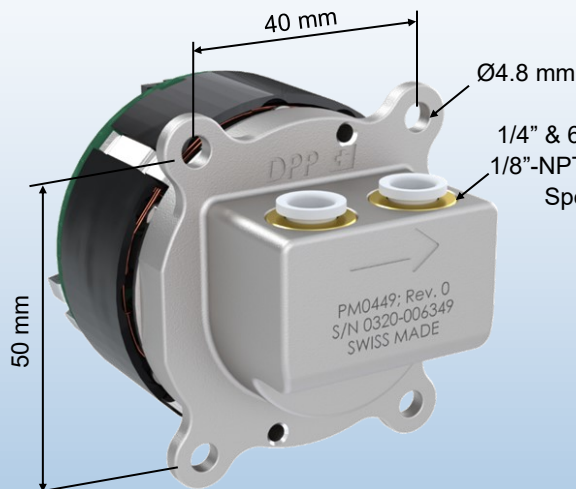

Advanced BLDC

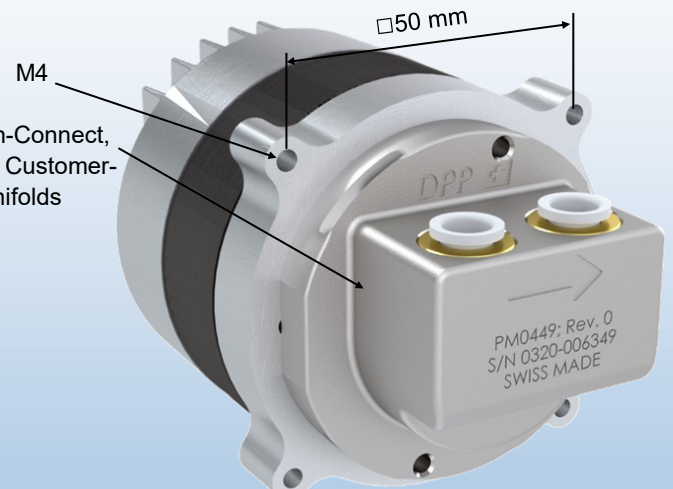

1/4" & 6mm Push-Connect,
1/8"-NPT, G1/8 & Customer-
Specific Manifolds



3D models available at www.dpp.swiss


Performance (water)

Data represents performance at room temperature




Cerotor 1000

Cerotor 1000 Maximum Flow Curves (water)

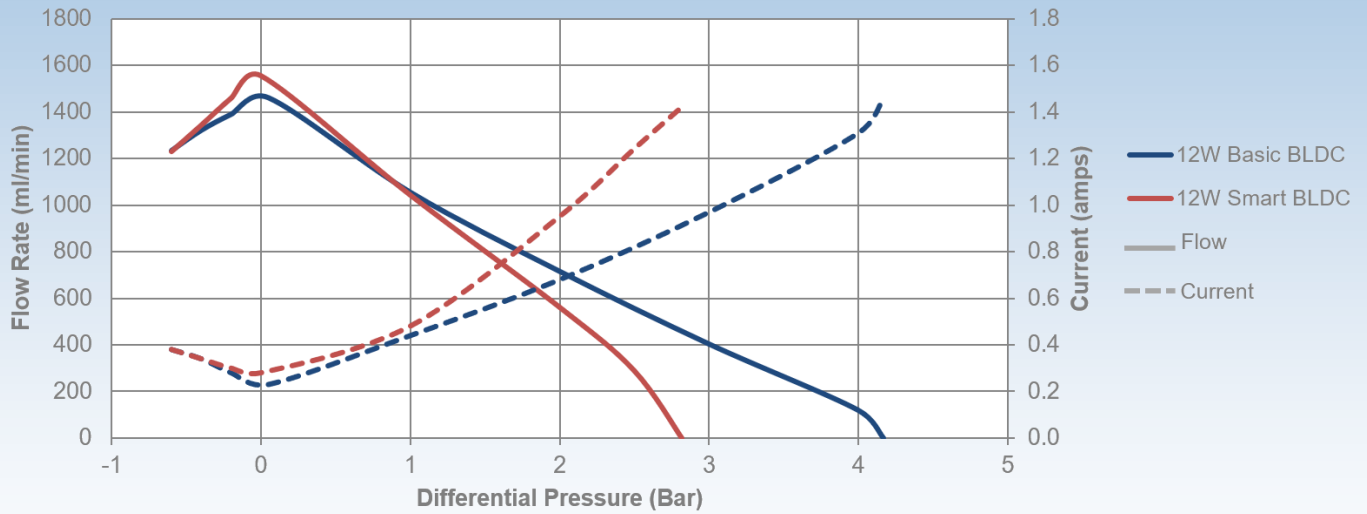

Cerotor 1500

Cerotor 1500 Maximum Flow Curves (water)

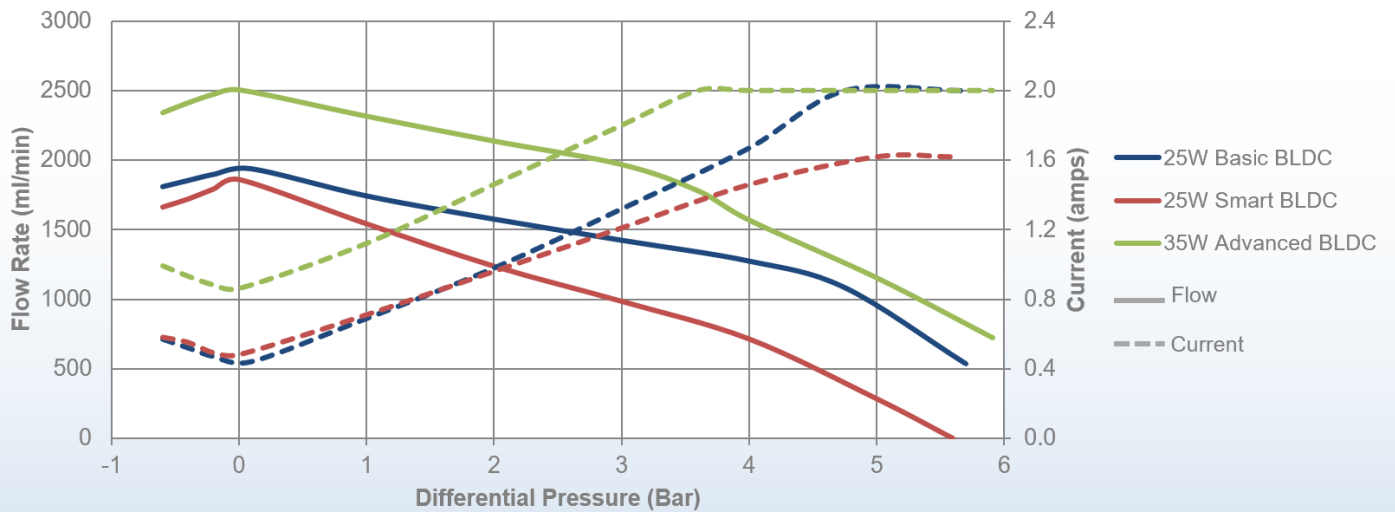


Performance (3cPs water/glycol)




Cerotor 1000

Cerotor 1000 Maximum Flow Curves (3cPs Glycol)

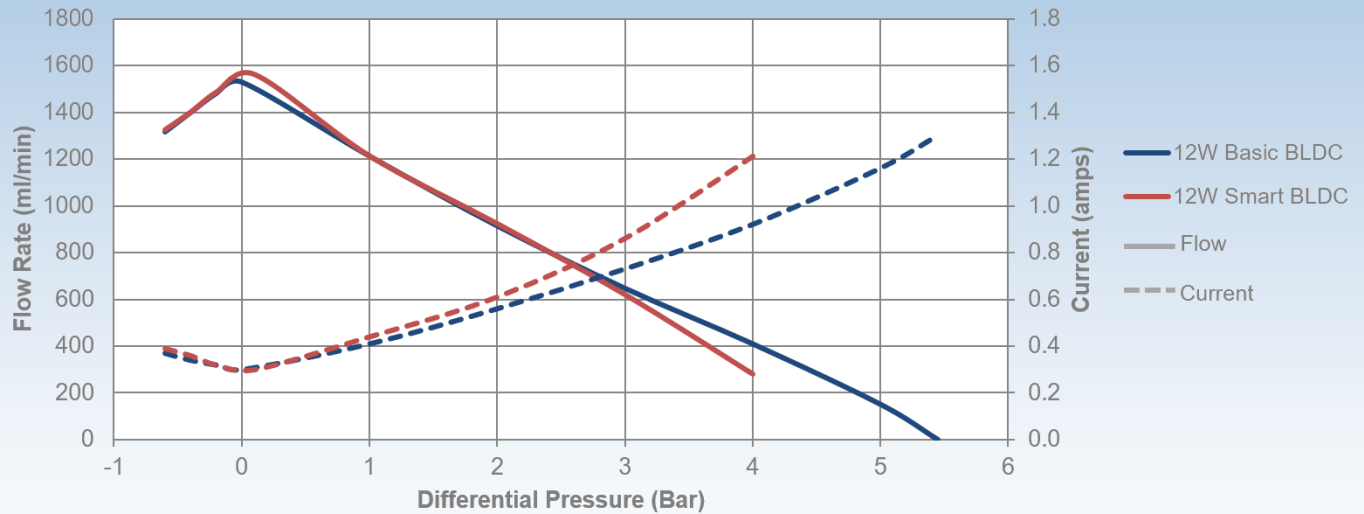

Cerotor 1500

Cerotor 1500 Maximum Flow Curves (3cPs Glycol)

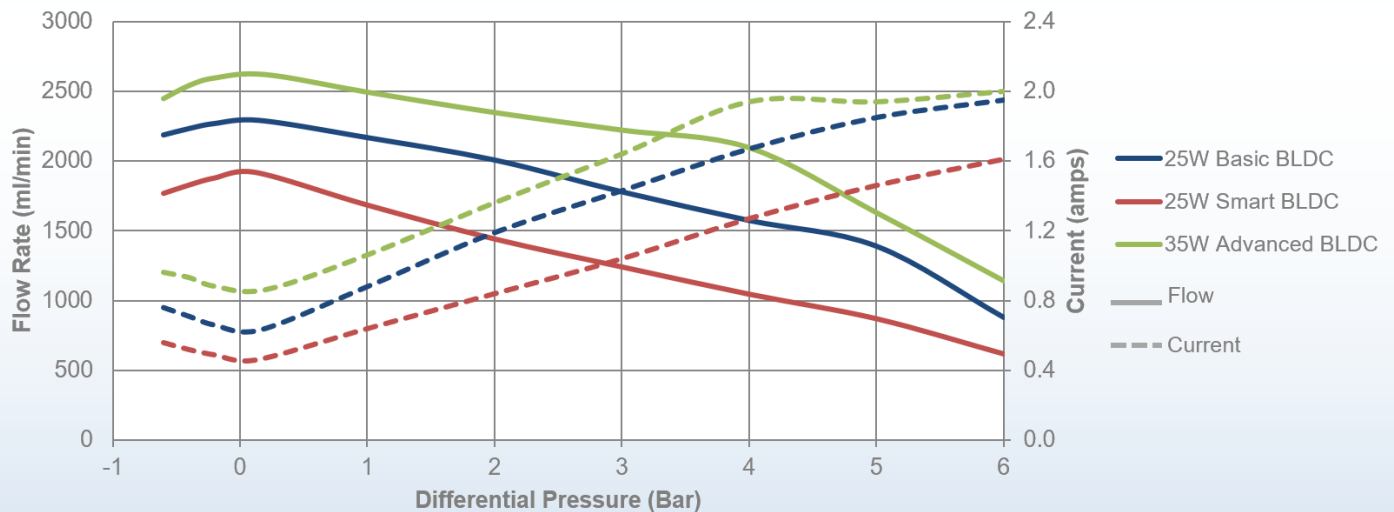

DPP is certified to ISO 9001 and operates a clean-room according to ISO Class 7. All pumps are customized; the information given represents one of the possibilities.

None of the information supplied by Diener Precision Pumps constitutes a warranty regarding product performance or use. Any information regarding performance or use is only offered as a suggestion for investigation for use, based upon Diener Precision Pump's or other customers' experience. DPP makes no warranties, expressed or implied, concerning the suitability or fitness of any of its products for any particular purpose. It is the responsibility of the customer to determine that the product is safe, lawful and technically suitable for the intended use. The disclosure of information herein is not a license to operate under, or a recommendation to infringe upon any patents. All new DPP product developments are tested and confirmed according to the «ROHS Directive».